


EUROSEAL[®] EUROCUTTER

Manual Gasket Cutting Machine

RCM

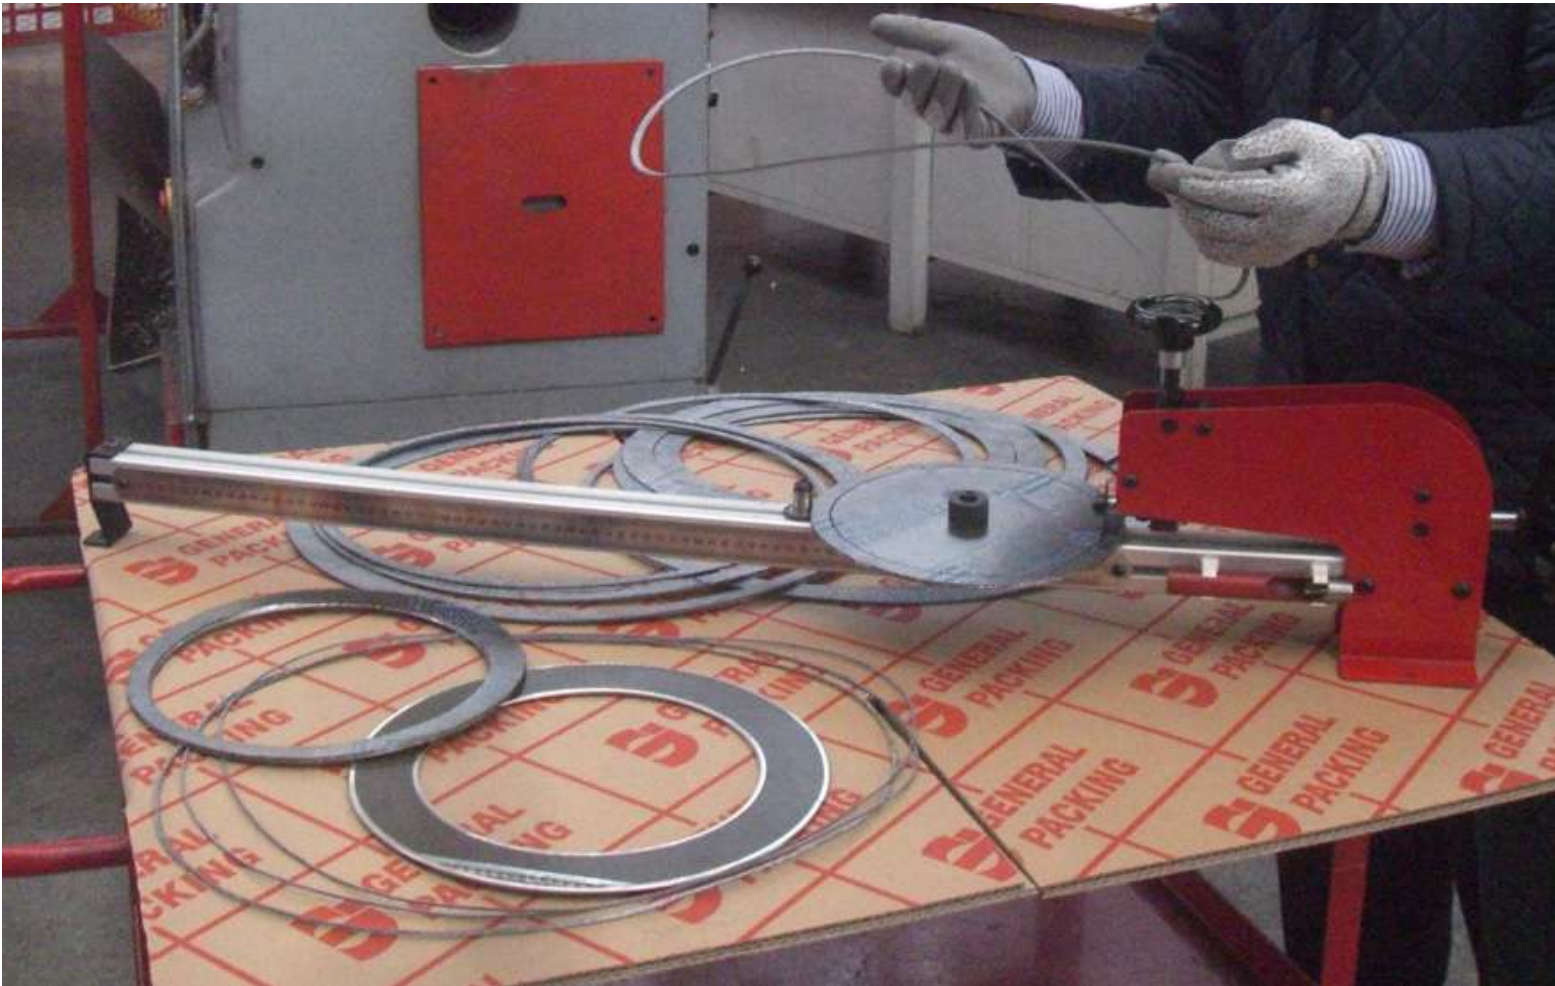

PERFORMANCE SUPERIORI

EUROSEAL® EURO CUTTER RCM è un dispositivo di taglio indispensabile per la produzione di guarnizioni in tutti i tipi di officina e di impianti industriali. Può essere facilmente utilizzato per realizzare guarnizioni circolari ricavate da una vasta gamma di materiali, dai fogli esenti amianto a quelli in grafite rinforzata con lamine di acciaio. EURO CUTTER RCM è uno strumento di precisione low-cost che garantisce perfetta maneggevolezza e sicurezza. L'EURO CUTTER RCM permette di ridurre lo spreco di tempo e di materiali costosi, nonché il rischio di incidenti. Un must have nel settore!

CARATTERISTICHE

- Manovella facile da usare per ruotare il foglio;
- Manovella per regolare gradualmente la pressione di taglio;
- Dotato di 4 lame intercambiabili di diverso diametro.



SUPERIOR PERFORMANCE

EUROSEAL® EURO CUTTER RCM is the essential cutting device for the production of gaskets in all kinds of workshops and industrial plants. It can be easily used to cut circular gaskets out of a wide range of materials, from the asbestos free sheets to the harder reinforced graphite. EURO CUTTER RCM is a low cost precision tool that guarantees perfect handiness and complete safety. The manual EURO CUTTER RCM allows to reduce the waste of time and expensive materials, as well as the risk of accidents. A must have in the field!


FEATURES

- Easy-to-use handle to rotate the sheet;
- Handle for gradual regulation of the cutting pressure;
- Provided with 4 interchangeable blades of different diameters.

PROPRIETA' TECNICHE TECHNICAL PROPERTIES



Max Diameter	1500 mm
Min Diameter	30 mm
Length	1015 mm
Weight	6,5 Kg

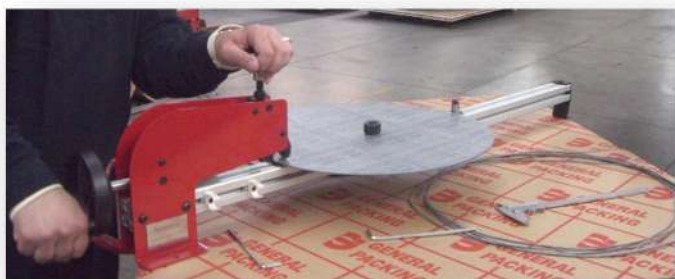

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

BREVI ISTRUZIONI D'USO

- Allineare il puntatore di centraggio nella posizione del diametro desiderato della guarnizione e quindi bloccare con l'apposita leva;
- praticare un foro di centraggio sul foglio da cui si vuole ricavare la guarnizione;
- fissare il foglio sul perno con l'apposito dispositivo di blocco;
- fissare la posizione della lama di taglio e quindi bloccarla;
- abbassare la lama di taglio fino ad incidere lievemente il foglio;
- continuare abbassando progressivamente la lama ruotando contemporaneamente il foglio con l'apposita manovella;
- tagliare la guarnizione ruotando il volantino più grande dopo aver abbassato di quanto è necessario la lama di taglio. Se il materiale da tagliare ha uno spessore superiore a 3 mm, si può evitare l'uso del piano d'appoggio tagliando il foglio per circa metà dello spessore, rivoltandolo ed effettuando la stessa operazione di taglio sull'altra faccia del foglio.

Importante:

Il perno della lama di taglio deve essere saltuariamente lubrificato. La lama di taglio è soggetta ad usura, ma può essere affilata o sostituita senza difficoltà. La taglierina è fornita con una lama di ricambio.

SHORT INSTRUCTIONS FOR USE

- Align the centering pointer in the position of the desired diameter of the gasket and then lock with the appropriate lever;
 - drill a centering hole on the sheet from which the gasket is to be obtained;
 - fix the sheet on the pin with the appropriate locking device;
 - fix the position of the cutting blade and then lock it;
 - lower the cutting blade until the sheet is slightly incised;
 - gradually lower the blade by simultaneously rotating the sheet with the appropriate handle;
 - cut the gasket by turning the larger handwheel after lowering the cutting blade by as much as necessary.
- If the material to be cut has a thickness greater than 3 mm, the use of the support surface can be avoided by cutting the sheet for about half the thickness, turning it over and carrying out the same cutting operation on the other face of the sheet.

Important:

The pin of the cutting blade must be occasionally lubricated. The cutting blade is subject to wear, but can be sharpened or replaced without difficulty. The cutter is supplied with a spare blade.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.