

# **■EUROSEAL<sup>®</sup>** ***DOUBLE SEAL SOFT***

Double Seal ePTFE, High Performance



PERFORMANCE SUPERIORI

EUROSEAL<sup>®</sup> Springtalllic Double Seal Soft è una guarnizione a spirale di estrema affidabilità per i servizi più gravosi.  
L'anello interno, oltre al compito di contenimento, effettua una **tenuta primaria** e protegge la spirale e le flange da corrosione e/o abrasione, grazie al suo rivestimento in PTFE espanso. In aggiunta tale anello metallico e il rispettivo rivestimento in PTFE espanso possono essere realizzati in differenti spessori a seconda delle esigenze dei clienti.  
La spirale rappresenta invece in questa configurazione una **tenuta secondaria**.

SUPERIOR PERFORMANCE


EUROSEAL<sup>®</sup> Springtalllic Double Seal Soft is a spiral wound gasket highly reliable and suitable to severe industrial application.  
The inner ring guarantees a **primary seal** and protects the spiral wound and flanges from corrosion and abrasion, thanks to its expanded PTFE cover.  
In addition metallic I.R. and ePTFE cover can be manufactured in customized thickness according to customer needs.  
The spiral, on the other hand, is a **secondary seal** in this configuration.

PROPRIETÀ TECNICHE - TECHNICAL PROPERTIES

| T <sub>Min</sub> (°C) | T <sub>Max</sub> (°C) | P <sub>Max</sub> (bar) |
|-----------------------|-----------------------|------------------------|
| -200                  | 260                   | 100                    |

CERTIFICATI - CERTIFICATES

| VDI 2440 - 2200    | API 6FB   |
|--------------------|-----------|
| Fugitive Emissions | Fire Test |

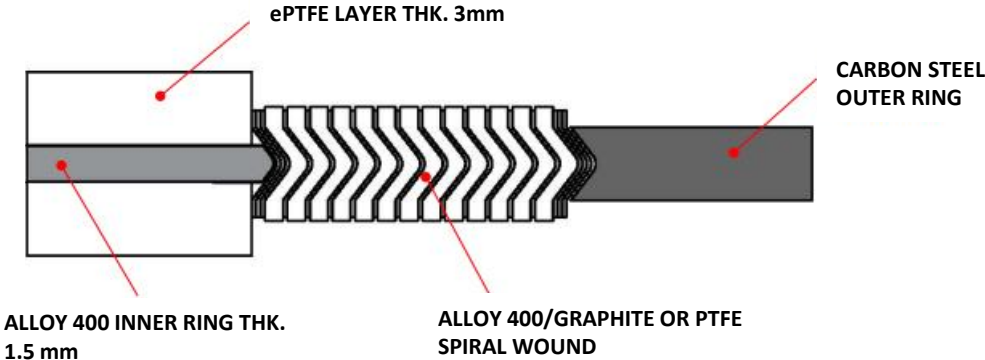

CONFEZIONI STANDARD - STANDARD PACKAGING

|                             |              |
|-----------------------------|--------------|
| 1/2" - 3" (DN 15 – DN 80)   | 25 / 50 pcs. |
| 4" - 6" (DN 100 – DN 150)   | 25 pcs       |
| 8" - 10" (DN 200 – DN 250)  | 10 pcs       |
| 12" - 30" (DN 300 – DN 750) | 5 pcs        |

MATERIALI DISPONIBILI - AVAILABLE MATERIALS

|                                                      |                                                    |
|------------------------------------------------------|----------------------------------------------------|
| ANELLO INTERNO – INNER RING                          | MONEL <sup>®</sup> 400/<br>AISI304/316L/321/347    |
| AVVOLGIMENTO METALLICO<br>SPIRALE – SWG STRIP        | MONEL <sup>®</sup> 400/<br>AISI304/316L/321/347    |
| AVVOLGIMENTO DI TENUTA<br>DELLA SPIRALE – SWG FILLER | GRAPHITE/PTFE                                      |
| ANELLO DI CENTRAGGIO – OUTER<br>RING                 | CS/MONEL <sup>®</sup> 400/<br>AISI304/316L/321/347 |

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY<sup>®</sup> has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY<sup>®</sup> does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.