


EUROSEAL[®] **6089**

Reliable Stuffing Box Seal

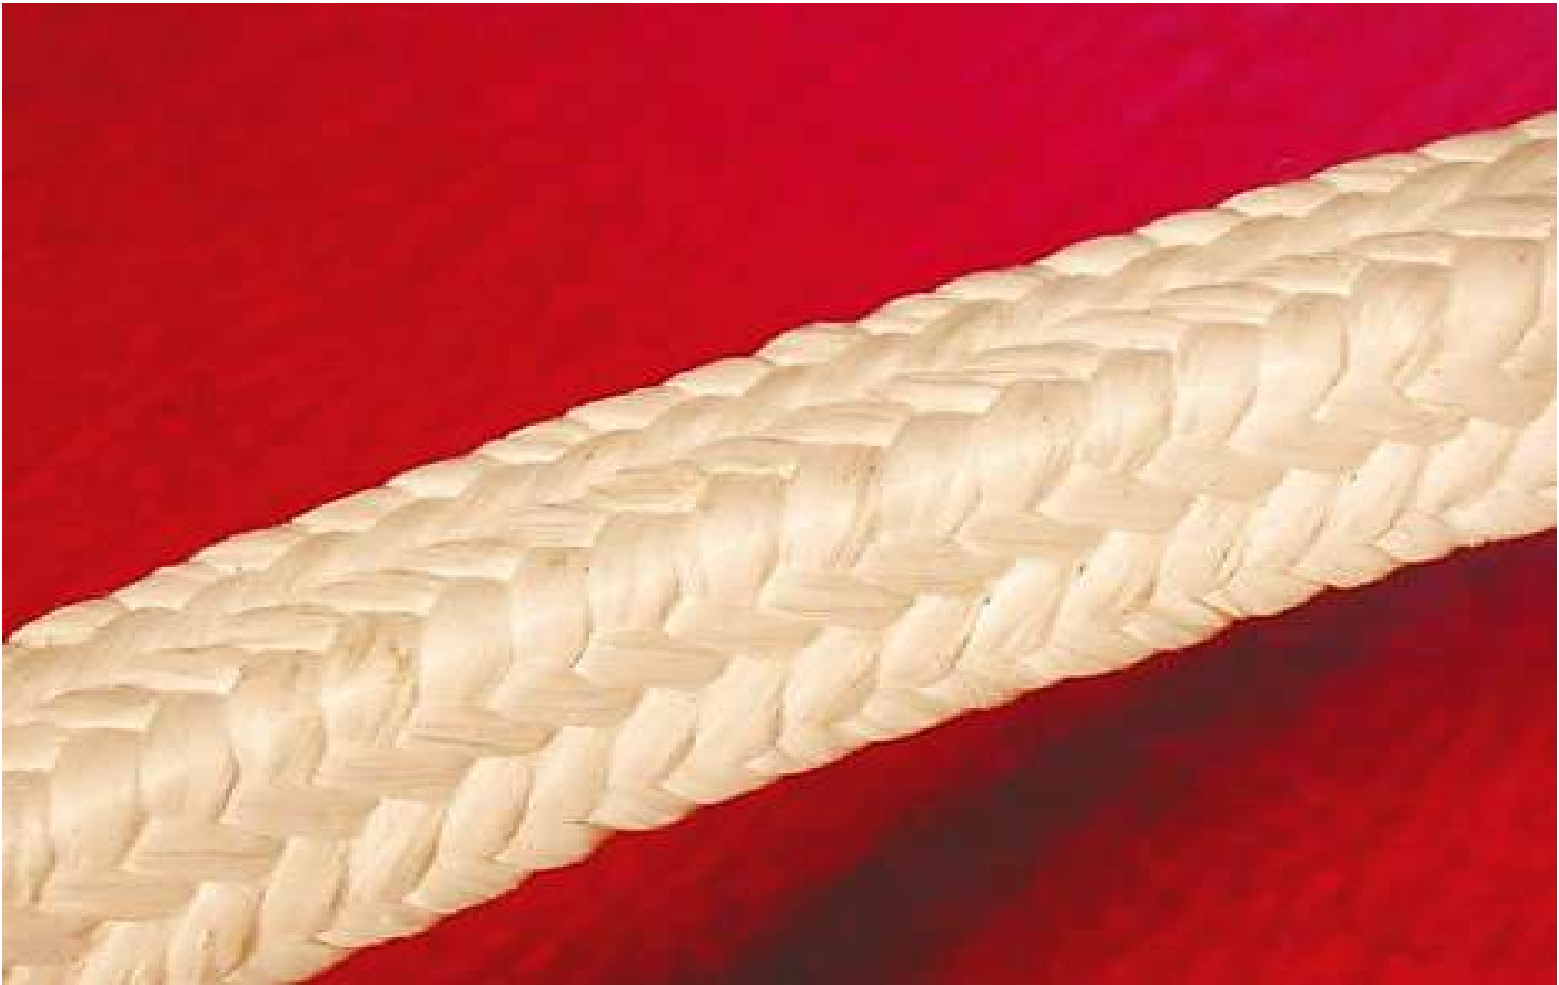

PERFORMANCE SUPERIORI

E' una baderna in puro PTFE ad alta densità, dimensionalmente stabile e a ridotto assorbimento di acqua.

Una dispersione di PTFE in polvere assicura una ridotta frizione superficiale e previene perdite attraverso l'intreccio della baderna stessa. Le fibre sono inoltre impregnate di un lubrificante inerte, che evita l'usura dell'albero e rende EUROSEAL® 6089 la miglior soluzione per utilizzi su apparecchiature con alberi rotanti, come pompe, agitatori, mixer, ecc.

Resistente ad una ampia varietà di prodotti chimici.




SUPERIOR PERFORMANCE

It is a packing made of pure high density PTFE, dimensionally stable and with a very low water absorption rate.

The dispersion of PTFE powder grants low superficial friction and prevents leaks through the packing braids. The fibers are impregnated with an inert lubricant, which avoids shaft wearing by the packing. It makes EUROSEAL® 6089 the best solution for rotary shaft service, such as pumps, agitators, mixers, etc.

EUROSEAL® 6089 resists to the vast majority of chemical media.

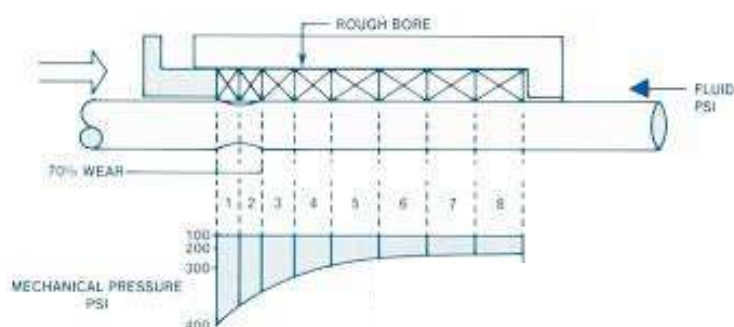


PROPRIETA' TECNICHE TECHNICAL PROPERTIES

T_{Min}	-200° C
T_{max}	260° C
P_{Max} (steam)	20 bar
pH	3 - 12
Speed	8 m/s

CONFEZIONI STANDARD STANDARD PACKAGING

1/8" - 9/16" (3 mm - 14 mm)	2 – 2,2 Kg
5/8" - 1" (16 mm - 25 mm)	4 – 4,4 Kg

Sezioni superiori a 25 mm disponibili su richiesta
Sections over 25 mm available on request

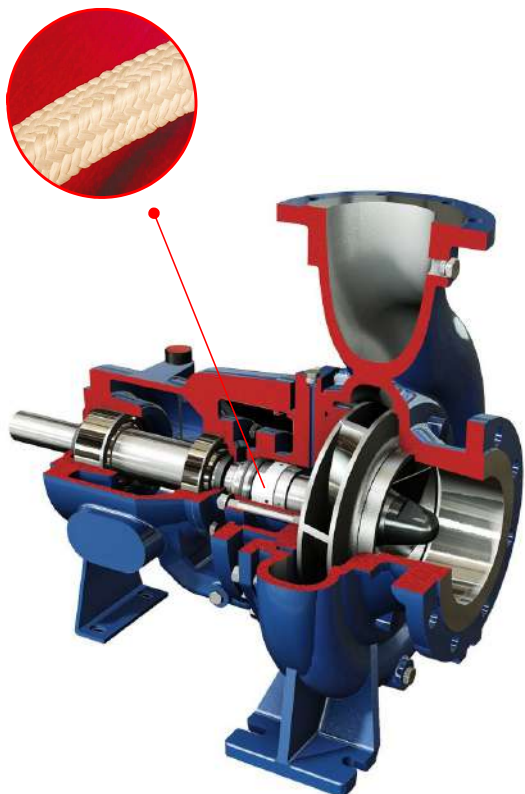

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.