



EUROSEAL[®] **CHEMSEAL**
High Chemical Resistance

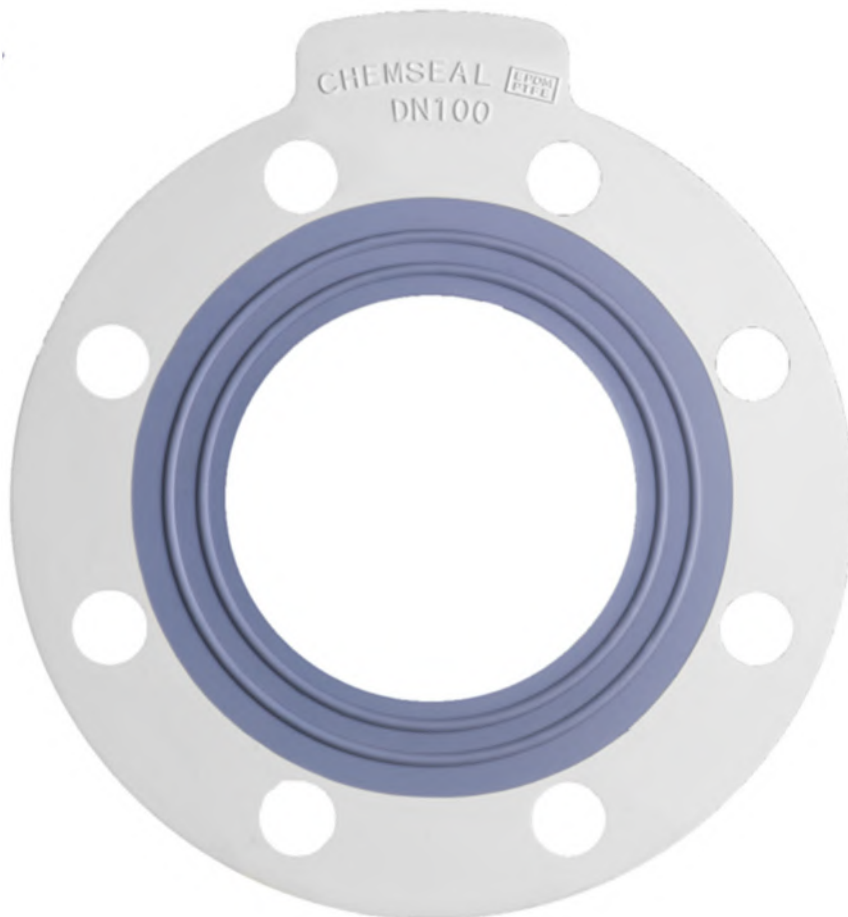

ELEVATA PUREZZA E COMPATIBILITA' CHIMICA

- Elastomero EPDM bianco o nero, con superficie di tenuta in PTFE.
- Esclusivo procedimento di ancoraggio del PTFE sull' elastomero.

La particolare forma della sezione riduce la zona di contatto tra guarnizione e flange (richiedendo un carico di serraggio inferiore del 75% circa). Ideali per impianti chimici, farmaceutici, alimentari, per l'industria dei semiconduttori e ovunque vi siano flange smaltate, plastiche, in fibra di vetro e non-metalliche in genere.
pH: 0 ÷ 14

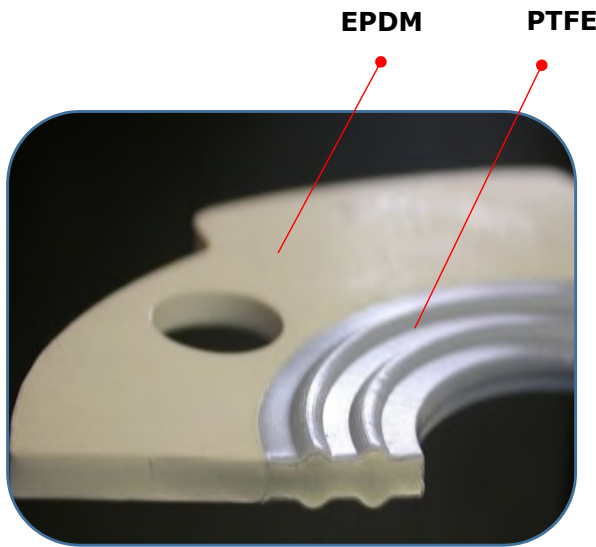

HIGH PURITY AND CHEMICAL RESISTANCE

- White or black EPDM elastomer with 100 % pure PTFE sealing surface.
- Exclusive process bonds PTFE to the EPDM.

The particular cross section reduces the contact point between gasket and flange (torque required is reduced as much as 75%). Excellent choice for chemical, pharmaceutical plants, for electronics industries and wherever there are glass lined, plastic, fiberglass and non-metallic flanges.
pH: 0 ÷ 14

PROPRIETA' TECNICHE - TECHNICAL PROPERTIES

T _{Max}	150° C
P _{Max}	17 bar
Compressibility	82 %
Factor M	2
Factor Y	400 psi
Recovery	33 %

CERTIFICATI - CERTIFICATES

VDI 2440
TA-Luft


VANTAGGI

- **RIUTILIZZABILE:** riduce i costi di stoccaggio, evitando anche dispendiose fermate.
- **Installazione guidata.**


BENEFITS

- Easy to install.
- **THE ONLY REUSABLE** gasket.

FACTOR M

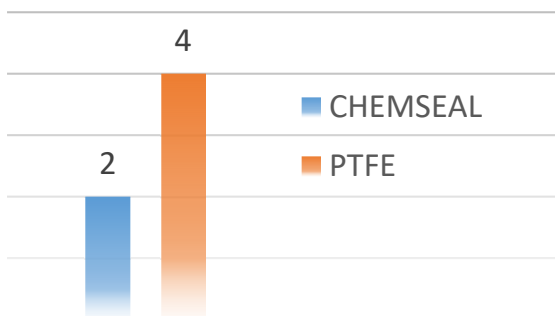

FACTOR Y

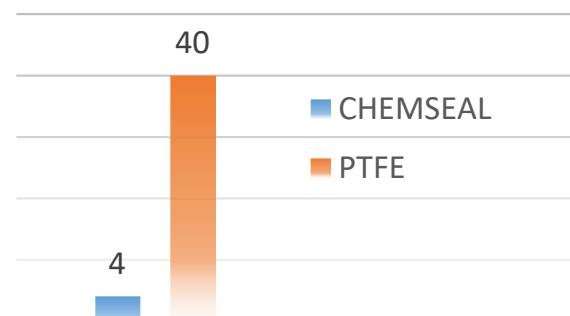

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.