

EUROSEAL[®] ***AUTOMATIC***
High Performance and Long Service Life **2622**




PERFORMANCE SUPERIORI

EUROSEAL® AUTOMATIC 2622 è un pacco di tenuta a sezione cup and cone composto da sette anelli di baderna EUROSEAL® 2622. Gli anelli Top e Bottom svolgono il ruolo di antiestrusori; nel mezzo del pacco invece ci sono cinque anelli e tra questi i 2 anelli alle estremità svolgono la funzione di adattatori. La baderna in grafite EUROSEAL® 2622 è stata progettata per soddisfare le specifiche API 622, API 589 Fire Safe e Chevron Texaco. Ampiamente utilizzata in varie applicazioni con differenti fluidi di esercizio come idrocarburi, vapore e agenti chimici non ossidanti, questo prodotto è stato creato per quelle applicazioni in cui è fondamentale un elevato controllo su perdite ed emissioni fuggitive.


SUPERIOR PERFORMANCE

EUROSEAL® AUTOMATIC 2622 is a cup and cone set made exclusively of seven EUROSEAL® 2622 packing rings. Top and bottom rings have an anti-extrusion function; in the middle there are five rings and the two external ones are adaptor rings. EUROSEAL® 2622 is the graphite engineered packing, designed to meet API 622 and API 589 Fire Safe and Chevron Texaco specifications. Widely used in various applications with different medias such as hydrocarbons, steam and non-oxidizing chemicals, this product has been conceived to be used in those cases in which leakage control is mandatory.

STANDAR CONFIGURATION - 7 RINGS

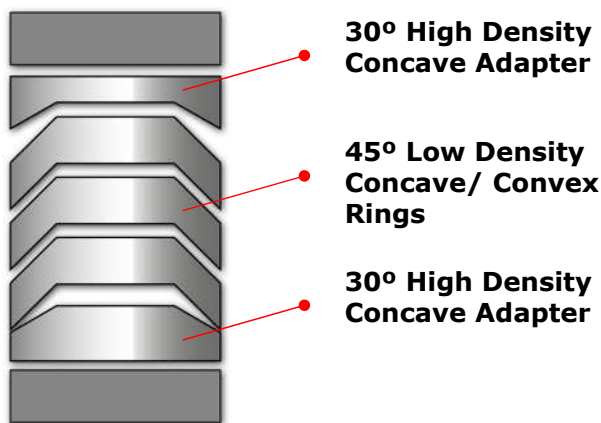

SPECIAL CONFIGURATION - 5 RINGS

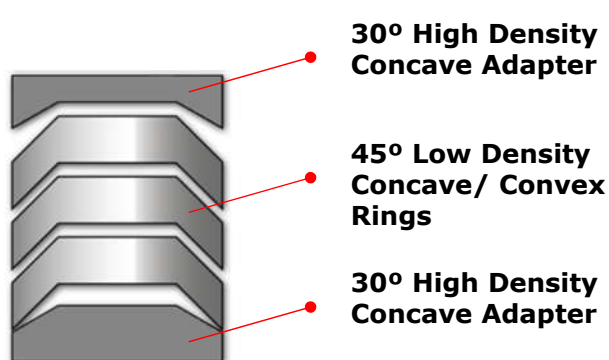

PROPRIETA' TECNICHE TECHNICAL PROPERTIES



T _{max} (steam)	650° C
T _{max} (st. atmosphere)	455° C
P _{max}	700 bar
pH	0 ÷ 14

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.